
## shielde<u>x</u>




## Shieldex® Bern

110030110100

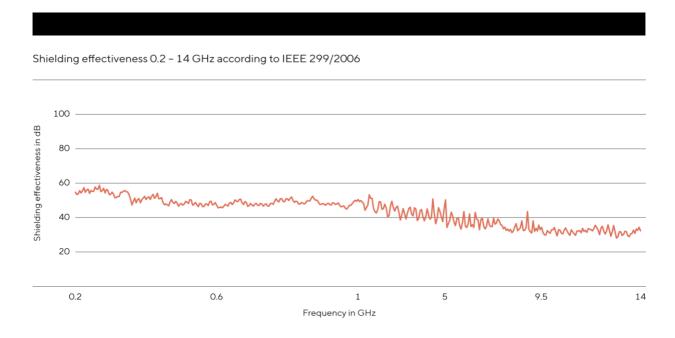

## shielde<u>x</u>



## Shieldex® Bern

110030110100

Raw Material 100 % Polyamide / Nylon 6.6

Cerex® 0.3 oz spunbonded Non-woven

Silver **Metal Plated** 

(60 % PA / 40 % Ag) ± 10 % **Material Composition** 

< 2.5 Ω/□ **Electrical Surface Resistivity** 

0.2 GHz - 14 GHz Measured Frequency

Average of 50 dB from 0.2 GHz - 2 GHz **Shielding Effectiveness 1** Average of 44 dB from 2 GHz - 5 GHz Shielding Effectiveness 2

Average of 34 dB from 5 GHz - 14 GHz Shielding Effectiveness 3

10-16 g/m<sup>2</sup> **Total Weight** 

 $0.09 \, \text{mm} \pm 25 \, \%$ **Total Thickness** 

 $100 \pm 3 \, cm$ **Roll Width Roll Length**  $50 \pm 3 \, \text{m}$ 

**Temperature Range** -30 °C to 90 °C

According to our care and handling instructions Storage and Handling

DIN EN ISO 9001:2015, REACH, RoHS **Compliance and Certification** 

Alterations Reserved 15.09.21/11 — The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note our handling and storage instructions as well accessible at www.shieldex.de.

