
## shielde<u>x</u>



## Shieldex<sup>®</sup> Kiel + 30

1300301101

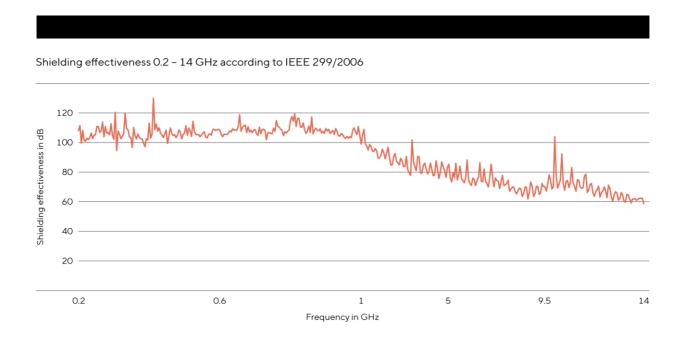

## shielde<u>x</u>



## Shieldex<sup>®</sup> Kiel + 30

1300301101

Raw Material 100 % Polyamide / Nylon 6.6

Non-woven PBN-II® 1.3 oz spunbonded

Metal Plated Copper

Material Composition (46,5 % PA / 48 % Cu / 4,5 % CR Coating) ± 10 %

+ CR Coating Protective acrylic coating

Electrical Surface Resistivity  $< 0.02 \Omega /\Box$ 

Measured Frequency 0.2 GHz – 14 GHz

Shielding Effectiveness 1 Average of  $107 \, dB$  from  $0.2 \, GHz - 2 \, GHz$ 

Shielding Effectiveness 2 Average of 85 dB from 2 GHz – 5 GHz

Shielding Effectiveness 3 Average of 71 dB from 5 GHz – 14 GHz

Abrasion Resistance ≥ 20000 cycles

Total Weight  $100 \text{ g/m}^2 \pm 15 \%$ 

Total Thickness 0.250 mm

Roll Width  $100 \pm 2 \, \text{cm}$ 

Roll Length Average 200 m

Temperature Range  $-30 \,^{\circ}\text{C}$  to  $90 \,^{\circ}\text{C}$ 

Storage and Handling According to our care and handling instructions

Compliance and Certification DIN EN ISO 9001:2015, REACH, RoHS

Alterations Reserved 16.09.2021/08 — The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note our handling and storage instructions as well accessible at www.shieldex.de.