




Shieldex[®] Pisa PW

1402101136

Shielding effectiveness 0.2 - 14 GHz according to IEEE 299/2006

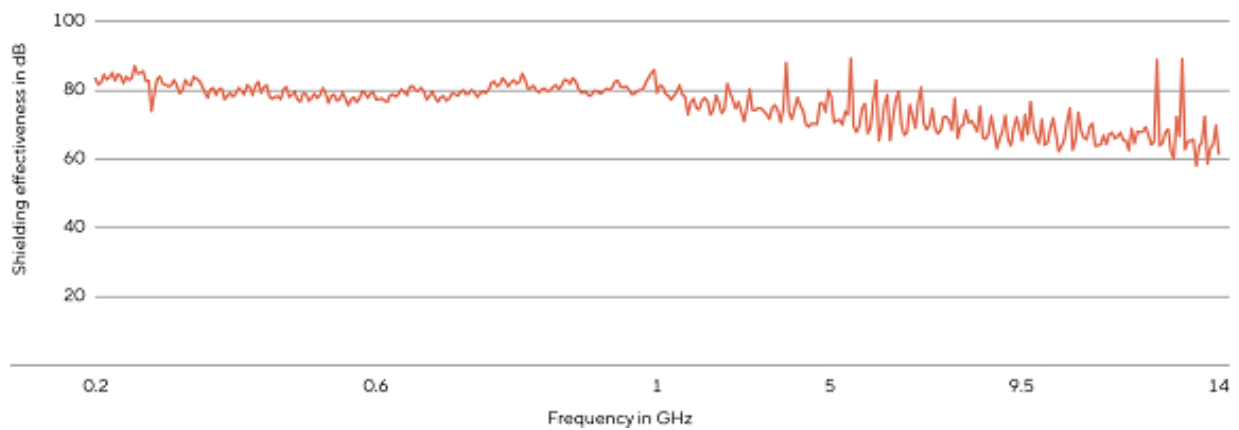

Ag	Cu	Ni	Sn
----	----	----	----

Shieldex[®] Pisa PW

1402101136

Raw Material	100 % Polyester
Weave	Plainweave
Thread density warp	≈ 580 threads/dm
Thread density weft	≈ 450 threads/dm
Metal Plated	Copper + Nickel
Material Composition	(35 % PES / 61 % Cu / 4 % Ni) ± 10 %
Electrical Surface Resistivity	≤ 0.05 Ω/□
Measured Frequency	0.2 GHz – 14 GHz
Shielding Effectiveness 1	Average of < 80 dB from 0.2 GHz – 2 GHz
Shielding Effectiveness 2	Average of < 75 dB from 2 GHz – 5 GHz
Shielding Effectiveness 3	Average of < 69 dB from 5 GHz – 14 GHz
Total Weight	78 g/m ² ± 10 %
Total Thickness	0.08 mm ± 15 %
Roll Width	134 ± 3 cm
Roll Length	< 200 m
Temperature Range	-30 °C to 90 °C
Storage and Handling	According to our care and handling instructions
Compliance and Certification	DIN EN ISO 9001:2015, REACH, RoHS

Alterations Reserved 12.09.2023/04 – The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note our handling and storage instructions as well accessible at www.shieldex.de.