
## shielde<u>x</u>



## Shieldex<sup>®</sup> Bremen PW

1100201130

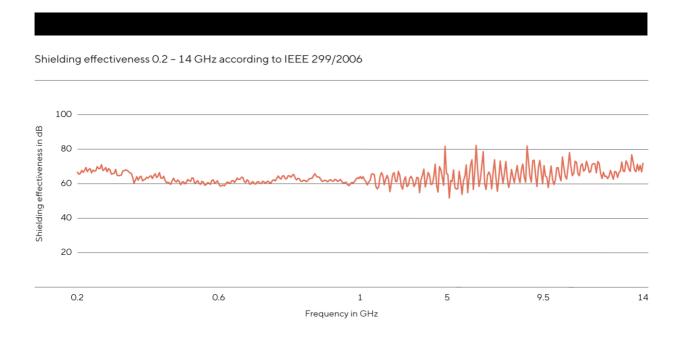

## shielde<u>x</u>



## Shieldex® **Bremen PW**

1100201130

Raw Material 100 % Polyamide / Nylon 6.6

Plain Weave Weave

≈ 480-500 threads/dm Thread density warp ≈ 460-480 threads/dm Thread density weft

**Metal Plated** 

(82 % PA / 18 % Ag) ± 10 % **Material Composition** 

**Electrical Surface Resistivity** < 0.3 Ω/□

0.2 GHz - 14 GHz Measured Frequency

Average of 63 dB from 0.2 GHz - 2 GHz Shielding Effectiveness 1 Average of 63 dB from 2 GHz - 5 GHz Shielding Effectiveness 2 Average of 67 dB from 5 GHz - 14 GHz **Shielding Effectiveness 3** 

 $43 \text{ g/m}^2 \pm 10 \%$ **Total Weight** 

**Total Thickness**  $0.09 \, \text{mm} \pm 12 \, \%$ 

**Roll Width**  $130 \pm 3 \, cm$ 

Average 100 m Roll Length -30 °C to 90 °C **Temperature Range** 

Storage and Handling According to our care and handling instructions

**Compliance and Certification** DIN EN ISO 9001:2015, REACH, RoHS

Alterations Reserved 16.09.21/04 – The above information has been compiled from our manufacturer area according to the latest state of development and application technology. Since application and further processing are beyond our control, no liability of the producer can be derived from the contents of the data sheet. All deviant or transcending data sheet information must be confirmed in written form by the manufacturer. Our general terms and conditions apply in all cases. All previous data sheets are invalid with the publication of this data sheet. Please note our handling and storage instructions as well accessible at www.shieldex.de.

